

ilcoLight UB

Fields of application


The *ilcoLight UB* is great addition to the *ilcon* control systems as it provides light where it is most needed: Around the patient's bed. Therefore the safety of the patients is greatly increased while the light does not disturb anyone. With its warm-light LED and its only marginal power consumption the *ilcoLight UB* is a great accessory to any *ilcon* system.

Product details

- Easily to integrate in the *ilcoPower ICS* or *ilcoPower SCR10* systems
- High luminosity through warm-light LED
- 16V DC input voltage
- Low power consumption, < 1 W
- Length: 200mm
- Coiled cable for flexible positioning on the bed
- Round profile for a flexible orientation
- Easy assembly with 2 mounting clips (bolted or affixed)
- Handset controlled
- Protection class IPx4
- Color RAL 7035 (light grey)

Usage / Working conditions

- Relative humidity from 25% to 85% (no condensation)
- Ambient temperature from 5°C to 35°C
- Atmospheric pressure from 700hPa to 1060hPa (level of ≤3.000m)
- Avoid mechanical shocks and damage
- Do not store outside
- Store in dust-free environment

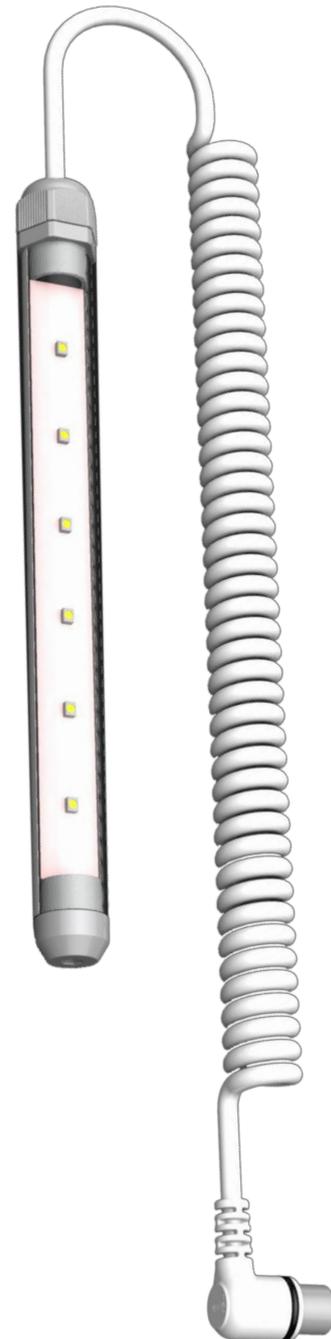

Dimensions (all in MM)

